

Melamine Screen on ZB-5ms with MSD (SIM)

Column: Zebron™ ZB-5MS, GC Cap. Column 30 m x 0.25 mm x 0.25 µm, Ea

Phase: 5% Phenyl-Arylene 95% Dimethylpolysiloxane

Dimensions: 30 meters x 0.25 mm x 0.25 µm

Order No: 7HG-G010-11

Oven Profile: 75 °C for 1 min to 320 °C @ 15 °C/min for 2.67 min.

Carrier Gas: Constant Flow Helium, 0.9 mL/min


Injection: Splitless :1 1 µL @ 280°C

Detection: Mass Selective (MSD) (320°C)

Analyst Note: High Standard using Scan Mode.
Analytes were derivatized with BSTFA in pyridine.
Cyanuric Acid (345*, 330, 188)
Melamine (327*, 342, 197)
Ammelide (344*, 329, 198)
Ammeline (328*, 343, 285)
DACP [IS] (273*, 288, 237)



Products used in this application:

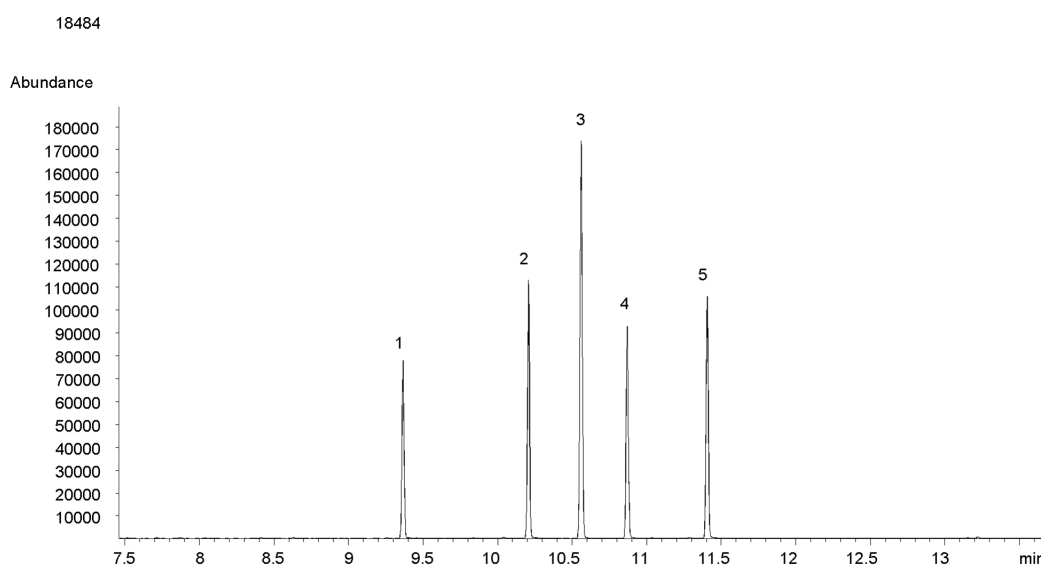

ANALYTES:

- 1 Cyanuric acid
- 2 Ammelide
- 3 DACP (internal standard)
- 4 Ammeline
- 5 Melamine

