

Azo Dyes on Kinetex 2.6µm C18 150 x 4.6mm ID

Column: Kinetex® 2.6 µm C18 100 Å, LC Column 150 x 4.6 mm, Ea

Dimensions: 150 x 4.6 mm ID

Order No: 00F-4462-E0

Elution Type: Gradient

Eluent A: 0.1% phosphoric acid in water

Eluent B: 0.1% phosphoric acid in acetonitrile

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
	1	0	75	25
	2	15	5	95
	3	17	5	95
	4	17.01	75	25
	5	20	75	25

Flow Rate: 1.8 mL/min

Col. Temp.: 50 °C

Detection: UV-Vis Abs.-Diode Array (PDA) @ 215 nm (ambient)


Analyst Note: SecurityGuard™ ULTRA Guard Cartridge System extends column lifetime.

- SecurityGuard ULTRA Cartridges, UHPLC C18 for 4.6mm ID Columns, 3/Pk Part No.: AJ0-8768

- Holder Part No.: AJ0-9000



Products used in this application:

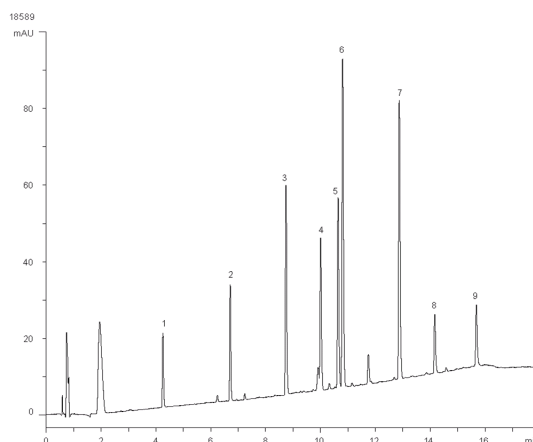

ANALYTES:

- 1** Orange II
Retention Time: 4.254 min
- 2** Sudan Orange G
Retention Time: 6.708 min
- 3** Fast Garnet GBC
Retention Time: 8.742 min
- 4** Dimethyl yellow
Retention Time: 10.007 min
- 5** Sudan Red G
Retention Time: 10.641 min
- 6** Sudan I
Retention Time: 10.808 min
- 7** Sudan II
Retention Time: 12.873 min
- 8** Sudan III
Retention Time: 14.157 min

©2019 Phenomenex, Inc. All rights reserved.

For more information contact your Phenomenex Representative at info@phenomenex.com



Phenomenex products are available worldwide.

Retention Time: 15.684 min
www.phenomenex.com

info@phenomenex.com